| SPECII | FICATI | 0 N S | | | |
|----------------------|---|---|--|--|--|
| 700i PRO Di | gital Bookle | et System | | | |
| Paper Size | | DSF-6000 Sheet Feeder | CFL Cover Feeder | Number of Stitches | 2 to 4 |
| Width | | 4.72" to 14.33" | 4.72" to 14.02" | Recommended Stitch Wire | 25 gauge, 0.55 mm, when stitching 2-30 sheets |
| Length | | 8.27" to 20.67" | 8.27" to 24.02" | | 24 gauge, 0.6 mm, required when stitching 31-50 sheets |
| Loading Capaci | ty | 24.02" | 2.36" (Trays 1 & 2) | Fore Edge Trim Amount | 0.04" to 0.98" (2.95" with optional 75 mm Trim Kit) |
| Buffer Capacity | 1 | 10 sheets or less (0.06"/1.5m | nm thickness or less) | Fore Edge Trim Cutting Thickness | Without square spine: 0.24" or less |
| Paper Weight | | 52.3-160 gsm (Less than 64 gsm maximum 10 sheets) | | | With square spine: 0.393" or less |
| Fine Quality Paper | | | | Finished Booklet Size | |
| Art Coated Paper | | 84-160 gsm | | Saddle stitch booklet with fore edge trim | Minimum 4.27" x 3.15" (4.72" x 2.95" with optional 75 mm Trim Kit) |
| Cover | | Up to 350 gsm | | | Maximum (DSF-6000): 14.33" x 10.30"/ (CFL): 14.02" x 11.97" |
| Curl | | 5 mm or less | | Caddla stitut haaldat with favo adva trius 0 | Minimum 4.73" v. 2.15" (4.73" v. 2.05" v. ith antiqual 75 mm Trim Vit) |
| Saddle Stitch & Fold | | WxL | | Saddle stitch booklet with fore edge trim & head/foot trim ³ | Minimum 4.72" x 3.15" (4.72" x 2.95" with optional 75 mm Trim Kit) |
| Minimum Paper Size | | 4.72" x 8.27" (Minimum paper width when doing 4 stitches is 7.62") 4.81" x 8.27" (2 stitches with head/foot trim) 3 | | nead/100t trim s | Maximum (DSF-6000): 14.25" x 10.30" / (CFL): 13.94" x 11.97" |
| | | 4.81" x 8.27" (2 stitches with 7.70" x 8.27" (4 stitches with | | 2-up saddle stitch booklets with one stitch | Minimum 3.15" x 3.16" (3.50" x 2.95" with optional 75 mm Trim Kit) |
| | | , | • | per booklet, fore edge trimmed, head/foot | Maximum (DSF-6000): 6.97" x 10" / (CFL): 6.81" x 10" |
| Maximum Pape | er Size | 7.88" x 8.27" (4 stitches, head/foot trim with 8mm gutter cut) ^{3,4} 14.33" x 20.67" (DSF-6000) | | trimmed with 8 mm gutter cut 3,4,6 | Maximum (DSI 0000). 0.57 X 10 / (CLL). 0.01 X 10 |
| Maximum r apo | LI JIZC | 14.02" x 24.02" (CFL) | | , | |
| | | | essing more than 30 sheets) 1,2 | 2-up saddle stitch booklets, two stitches | Minimum 3.65" x 3.15" (3.65" x 2.95" with optional 75 mm Trim Kit) |
| Side Stitch | | 8.27" x 8.27" | Stitch position range varies upon paper | per booklet, fore edge trimmed, head/foot | Maximum (DSF-6000): 6.97" x 10" / (CFL): 6.81" x 10" |
| Minimum Pape | er Size | 14.33" x 14.33" (DSF-6000) | width and number of stitches | trimmed with 8 mm gutter cut 3, 4, 5, 6 | |
| Maximum Pape | er Size | 14.02" x 14.33" (CFL) | No fore edge trim | Processing Speed | Up to 4,800 sets per hour ⁷ |
| Corner Stitch | | 7.29″x 8.27" | | | |
| Minimum Pape | | | | DKTS-200 Two Knife Trimmer (Option | |
| Maximum Pape | | 14.01" x 14.33" | | Receivable Booklet Size | Width: 4.13" to 14.33" Length: 2.95" to 12.59" |
| Number of She | | 2 to 30 | | Trim Amount | Head: 0.04" to 1.18" Foot: 0.04" to 1.18" |
| Saddle Stitch & | Fold | 31 to 50 | Square spine required | Offset Trim | 0.04" to 0.83" |
| | | | • No head/foot trim | Trim Thickness | 0.23" or less |
| | | | Paper width: 7.87" to 12.60" Paper length: 10.63" to 17.72" Cover: 300 qsm or less | 8 mm Gutter Cutter Option | |
| | | | | Receivable Booklet Size | Width: 7.88" to 14.33" Length: 2.95" to 10" |
| Fold Only (No S | ititch) | 2 to 5 | Cover, 500 gsin or less | Trim Thickness | 0.15" or less |
| Side/Corner Sti | , | 5 to 20 | | Paper Size | Width: 4.14" to 14.33" Length: 6.70" to 25.19" |
| | | 2 to 50 | A4 LEF, A4SR LEF, LTR LEF with fine quality | HSC Slitter Module (Option) | |
| | | | paper 81.4 gsm | Number of Slits | 2 |
| | | 5 to 30 | | Slit Amount | 0.12" to 1" (3 to 25.4 mm) |
| Features | DSE,6000 | Shoot Foodor | | DBM-700/DBM-700T Bookletmaker | 2 Trimmor |
| Control Panel | | DSF-6000 Sheet Feeder PC Controller and LCD | | PC Controller and LCD | |
| Detections | | | Paper jam, wire feed detection, miss stitch detection | | |
| Detections | Miss-feed, optical and ultrasonic double feed detections, jam detection, Optical Mark Reader, Paper jam, wire feed detection, miss stitch detection optional barcode readers for checking set integrity | | | | etection |
| Other | Automated functions: DSF-6000 side and rear paper feed guides, buffer stopper and side guides | | | Automated functions: stitch head position, back jogger, side guide/joggers, stitch stop position, fold stop position, fold roller gap, trim stop position, trimmer transport belt gap adjustment | |
| Ontions | DSF-CFL Cover Feeder, Barcode Kit for DSF-6000, Barcode Kit for DSF-CFL | | | DBM-700S Square Spine, 4-Stitch Head Kit for DBM-700 (2 additional stitches required, sold separately), 75 mm | |
| Options | | | | (2.95") Trim Kit for DBM-700T Trimmer, 50 Sheet Trim Kit for DBM-700T Trimmer, Air Kit for DBM-700, miss stitch | |
| | | | | detection sensor kit for DBM-700, additional miss stitch detection sensor kit when adding 4-Stitch Kit to DBM-700, | |
| | | | Short Stacker Conveyor, miss stitch detection, Long Stacker Conveyor | | |
| | | | | conveyor, mass suiter detection | ,g |
| | | | | B1 1 | M. chi t. Le |

| | Power Requirements | Dimensions | Net Weight |
|----------------------------|---|--|-------------------|
| DSF-6000 Sheet Feeder | 100 - 240 VAC 50/60 Hz 2.7 - 1.2 A 250W (IF Box: 100 - 240 VAC 50/60 Hz 1.9 - 0.8 A 180W) | 59.8" x 31.3" x 45.2" (1519 x 795 x 1148 mm) | 667 lb/303 kg |
| DBM-700 Bookletmaker | 120V 60Hz 6A 565W | 77.8" x 38.8" x 59.3" (1976 x 986 x 1507 mm) | 806.9 lb/366 kg |
| DBM-700S Square Spine | Supplied by the DBM-700 | 10.2" x 36.8" x 44.9" (259 x 934 x 1140 mm) | 260 lb/118 kg |
| DBM-700T Trimmer | 120V 60Hz 7.0A 620W | 28.3" x 68.7" x 67.4" (719 x 1746 x 1712 mm) | 531.3 lb/241 kg |
| DBM-HSC High Speed Creaser | 100-240V 50/60Hz 3.5 to 1.6A 285W | 54.53" x 29.73" x 33.27" (1385 x 755 x 845 mm) | 535.7 lb/243 kg |
| DKTS-200 Two Knife Trimmer | 200-240V 50/60Hz 3.3A 450W | 93.9" x 53.9" x 63.7" (2385 x 1369 x 1618 mm) | 1,309.6 lb/594 kg |

¹ Optional DBM-700S Square Spine required 2 Optional 50 Sheet Booklet Trim Kit required 3 Optional DKTS-200 Two Knife Trimmer is required. Head/foot trim 4 Optional 8mm Gutter required 5 Optional 4 Stitch Kit and two additional stitch heads are required 6 Depending on the paper length, number of sheets and the overall system settings, the processing speed is subject to decrease.

The leading provider of innovative precision initialing, print consecution, Contact us today to request samples or to get in touch with a finishing specialist. The leading provider of innovative precision finishing, print embellishment, and specialty finishing solutions.

Duplo USA Corporation

3050 S. Daimler St.

Santa Ana, California 92705 Toll Free: 1-800-255-1933 Telephone: 1-949-752-8222

Email: sales@duplousa.com

Find Us Online



duplousa.com

linkedin.com/company/duplo-usa-corporation



facebook.com/duplousa




twitter.com/duplousa



youtube.com/duplousa

©2024 Duplo USA Corporation. All rights reserved. The information contained herein is subject to change without notice and products may be shown with optional features. Duplo shall not be liable for any errors or omissions contained in this document.

Duplo

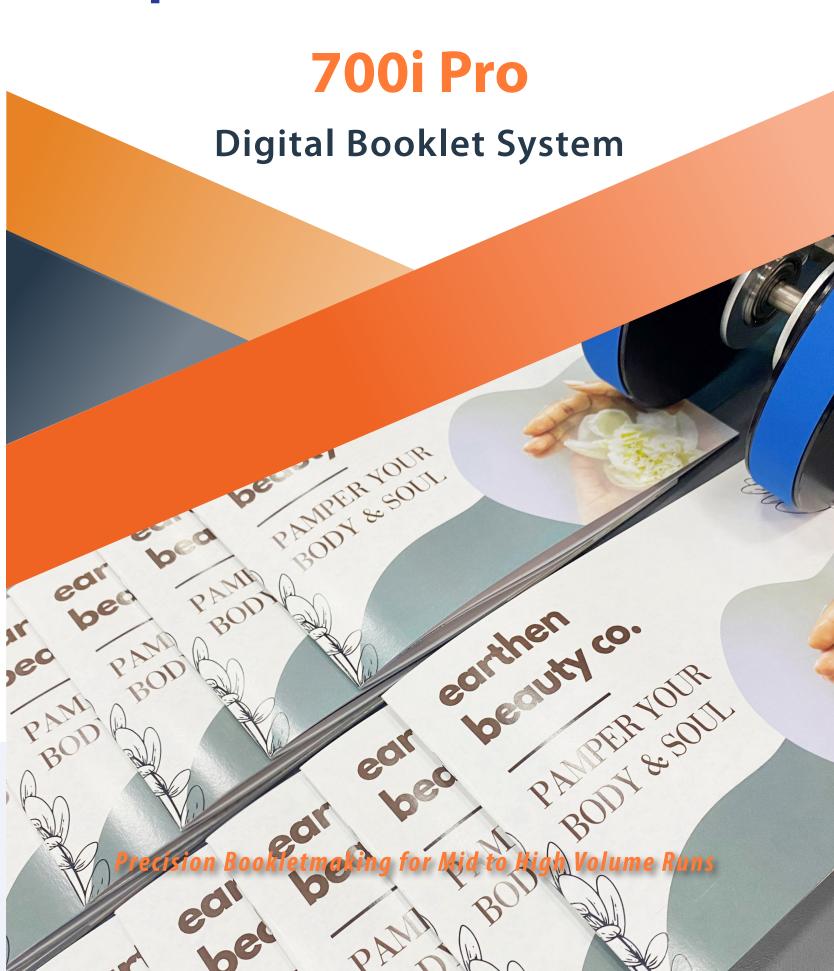

 $Square\ spine\ booklets\ cannot\ be\ head/foot\ trimmed.\ Square\ spine\ booklets\ can\ only\ pass\ through\ the\ DKTS-200\ without\ trimming\ pass\ p$

700i Pro Digital Booklet System

The 700i Pro Digital Booklet System integrates the high-speed DSF-6000 Sheet Feeder with the DBM-700 Bookletmaker. It offers full-bleed trimming and square spine options with the capability to produce 50-sheet booklets.

Suitable for larger digital print productions, the 700i Pro delivers a variety of applications with automated precision on demand up to 4,800 booklets per hour.



AUTOMATED SETTINGS AND CHANGEOVERS

Improve overall efficiency with fully automated settings that are managed entirely from a PC station. Utilizing the PC Controller software, you can set up jobs in under 60 seconds. Simply select or enter a custom paper size and the PC Controller will automatically set the stitch, fold, and trim setting. Any fine-tune adjustments can be made with ease.

Use the computer's memory to save an unlimited number of jobs and retrieve them as needed. Changeovers from one size to another are performed within seconds and without any intervention or tooling

The 700i Pro also comes included with a 1-year subscription of Duplo+ Insight, a cloud-based system that captures real-time data from the bookletmaking system. The dashboard provides a quick overview of the status and performance while analytical graphs and reports provide insight for better decision making.



HIGH SPEED SHEET FEEDING

Maximize productivity with rapid sheet feeding and process output from your digital presses with great efficiency. The DSF-6000 Sheet Feeder delivers reliable performance with three-side air separation, a static eliminator, and a 24" feed capacity for longer runs.

Built-in optical and ultrasonic sensors detect any misfeeds or double feeds and support the feeding of various paper types and weights. Also comes standard with an Optical Mark Reader. Optional barcode reader kits can be added to read 1D and 2D barcodes to identify each set and verify that each sheet is fed in the proper sequence.

The DSF-6000 also provides the DSF-CFL Cover Feeder option to feed covers separately. Or it can be utilized independently to feed both the cover and inner sheets up to 14" x 24" for applications such as letter landscape




Maximizing efficiency in bookletmaking saves your business both time and money. The DBM-700/T integrates the stitcher, folder, and face trimmer into one automated system – eliminating the task of setting and folding signatures separately.

As each set is fed, the system guides it through the stitching and folding sections. Equipped with 2 Hohner stitch heads, the DBM-700 can apply 2 or 4 stitches. The automated stitch function enables the stitch heads to cycle twice per booklet and automatically change the position of the stitch heads after each cycle. Easily switch from 2-stitch booklets to 4-stitch jobs without any retooling.

The 4-stitch kit option is available when productivity is priority. The bookletmaker automatically positions the stitch then adjusts the fold roller gap and trimmer transport belts according to the thickness of the booklet. Booklets are trimmed at the fore-edge for a clean finish.





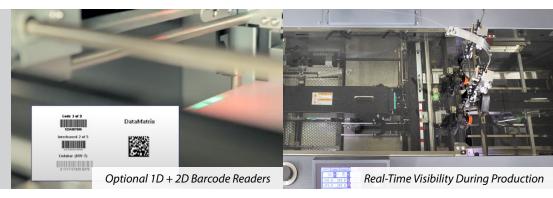



APPLICATIONS



Letter Landscape



Booklets with Raised UV Covers



50-Sheet Booklets



Small Booklets



FULL-BLEED TRIMMING **OPTIONS**

The DKTS-200 Two Knife Trimmer provides head and foot trimming for full-bleed finished booklets. An optional gutter cutter can be added for 2-up finishing capabilities. The gutter cutter along with the 4-stitch capability double the productivity of small format jobs up to 9,600 booklets per hour.

The DBM-HSCII High Speed Creaser offers an optional slitting module to deliver full-bleed finished booklets. Creasing the cover and innermost sheets prior to folding prevents toner cracking. The slitter trims the head and foot to eliminate the task of pre-cutting the sheets on a quillotine.



SOUARE BACK OPTION

The DBM-700S adds a square spine finish to deliver thicker, flatter books. Square spine booklets lay flat and make packing more efficient, saving you money. Enhance the appearance and produce value-added booklets up to 50 sheets/200-page booklets with a perfect bound look in-line with the DBM-700S Square Spine, the fastest in the market.





Scan to watch the video

- Sheet feeding and bookletmaking for high productions
- Performs saddle and side/corner stitching
- Produces saddle-stitched booklets up to 30 sheets with or without square spine and up to 50 sheets with square spine
- Creates 4-stitch booklets using 2 stitch
- Duplo+ Insight with 1-year subscription included



700i Pro Digital Booklet System with DBM-HSCII High

Speed Creaser and DKT-200 Two Knife Trimmer