CP375 DUOTF PERFORATING, CREASING, FOLDING

Technical Specifications --- CP375 DUOTF

Feeder System	Suction Feeder
Feeder Capacity	7.08” (180 mm)
Paper Size Minimum	4.13” x 5.82” (105 x 148 mm)
Paper Size Maximum	14.76” x 25.98” (375 x 660 mm) With table extension: 14.76” x 41.33” (375 x 1,050 mm)
Paper Stocks Perforating	80 - 300 gsm or max 0.3 mm*
Paper Stocks Creasing & Folding	80 - 400 gsm or max 0.4 mm*
Sheet Transfer Device	Vacuum Belt
Control Panel	10.1” High Resolution Touchscreen

Double Sheet Detection	Ultrasonic
Working System	Multigraf Quick-Set™
Deliveries	Folding = shingling delivery Creasing Only = lower reception tray
Speed	Up to 6,000 LTR/H
Dimension	125” x 24” x 52”
Weight	805 lb (365 kg)
Electrical Connection	100-240 VAC, 50/60 Hz
Certification	UL/UL-C

* Paper stocks depend on material quality.

Multiple Applications

The creasing tools (positive and negative) as well as the perforating tools (standard and stop perforation) may be used on either tool position.

❶ Creasing tool negative
❷ Creasing tool positive



Two Cross Tool Positions

The creasing and perforating tools are automatically detected and the relevant pressure is automatically set. No manual adjustments are necessary.

CP375 DUOTF

Duplo The leading provider of innovative precision finishing, print embellishment, and specialty finishing solutions.
Contact us today to request samples or to get in touch with a finishing specialist.

Duplo USA Corporation

3050 S. Daimler St.
Santa Ana, California 92705
Toll Free: 1-800-255-1933
Telephone: 1-949-752-8222
Email: sales@duplousa.com

Find Us Online

duplousa.com
linkedin.com/company/duplo-usa-corporation
youtube.com/duplousa

All rights reserved. The information contained herein is subject to change without notice and products may be shown with optional features. Duplo shall not be liable for any errors or omissions contained in this document.

0626

Duplo

HIGH SPEED
PERFORATING, CREASING & FOLDING

CF375 XPRO
CP375 DUO
CP375 DUOTF

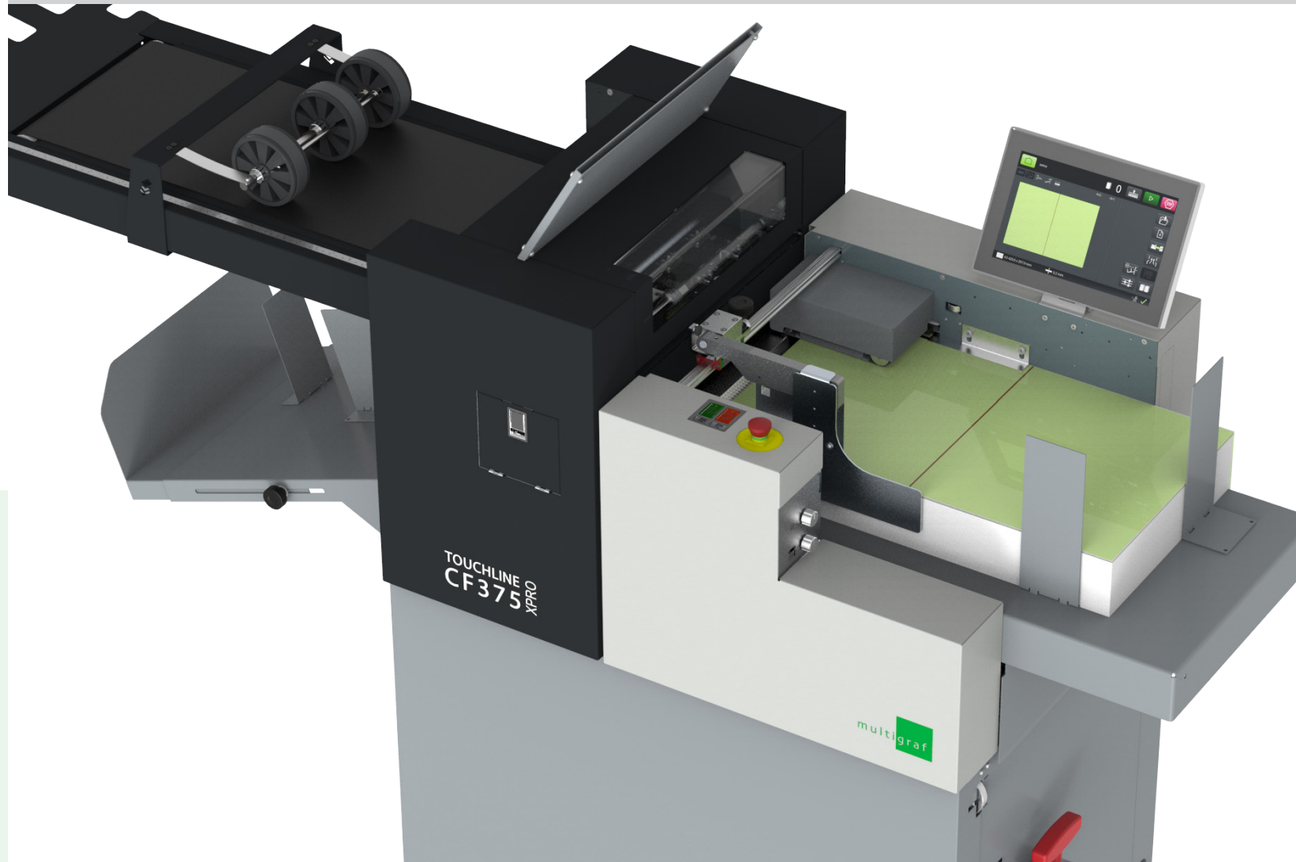

CF375 XPRO CREASING & FOLDING

Technical Specifications --- CF375 XPRO

Feeder System	Air suction with double-feed detection
Feeder Capacity	7.08” (180 mm)
Paper Size Minimum	4.13” x 5.82” (105 x 148 mm)
Paper Size Maximum	14.76” x 25.98” (375 x 660 mm) With table extension: 14.76” x 41.33” (375 x 1,050 mm)
Paper Stocks	80 - 400 gsm or max 0.4 mm*
Control Panel	10.1” High Resolution Touchscreen
Creasing System	Multigraf Swing-Bar™
Crease Styles	2, standard and narrow
Crease Depths	3 automatic setups
Minimum Crease Distance	1.18” (30 mm)
Number of Creases	20

Fold System	Multigraf Pro-Knife™
Number of Fold Knives	2
Fold Length Minimum	1.18” (30 mm)
Fold Length Maximum	19.68” (500 mm)
Delivery Belt Length	35.43” (820 mm)
Reception Tray Height	4.72” (120 mm)
Speed	Up to 6,000 LTR/H
Dimension	74” x 24” x 52”
Weight	432 lb (196 kg)
Electrical Connection	100-240 VAC, 50/60 Hz
Certification	UL/UL-C

* Paper stocks depend on material quality.

CF375 XPRO supports the following common fold types:



without folding | single fold | letter fold | Z fold | gate fold | closed gate fold | double parallel fold

The next-generation CF375 XPRO is designed for ease of use, reducing the operator learning curve while maximizing productivity. A larger display with an intuitive interface allows for quick job setup and an efficient operation, handling crease and fold jobs at speeds of up to 6,000 sheets per hour.

CF375 XPRO

Enhanced User Experience

A redesigned 10.1” display simplifies machine interaction for real-time performance information and easier troubleshooting.

Dual Delivery System

Crease and fold jobs are delivered to the top conveyor, while crease-only jobs are stacked in the bottom tray for added convenience.

Optional Modules for Greater Versatility

Expand capabilities with optional scoring, slitting, and perforating modules (along the length of the sheet), allowing you to handle a wider range of applications with ease.

CP375 DUO PERFORATING & CREASING

Technical Specifications --- CP375 DUO

Feeder System	Suction Feeder
Feeder Capacity	7.08” (180 mm)
Paper Size Minimum	4.13” x 5.82” (105 x 148 mm)
Paper Size Maximum	14.76” x 25.98” (375 x 660 mm) With table extension: 14.76” x 41.33” (375 x 1,050 mm)
Paper Stocks Perforating	80 - 300 gsm or max 0.3 mm*
Paper Stocks Creasing	80 - 400 gsm or max 0.4 mm*
Creasing System	Multigraf Swing-Bar™
Control Panel	10.1” High Resolution Touchscreen

Double Sheet Detection	Ultrasonic
Working System	Multigraf Quick-Set™
Reception Tray Height	80 - 400 gsm or max 0.4 mm*
Speed	Up to 6,000 LTR/H
Delivery Belt	Optional Shingling Delivery, L = 43.3” (1,100 mm), P/N 482.112
Dimension	65” X 24” X 48”
Weight	362 lb (164 kg)
Electrical Connection	100-240 VAC, 50/60 Hz
Certification	UL/UL-C

* Paper stocks depend on material quality.

Sample Applications In One Operation

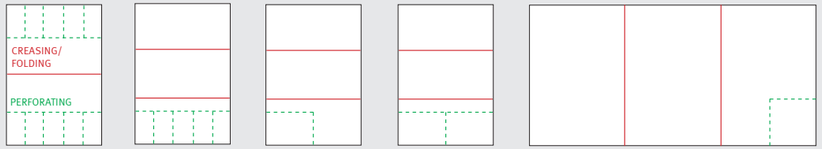

Standard Tools Cross Direction

	Perforating	Creasing
Tool Detection	Automatic	Automatic
Pressure Adjustment	3 depths for each style	3 depths for each style
Number of Tools (Standard)	1 perforating tool, 11 TPI	1 negative creasing tool
Optional Perforating Knife	17 TPI and 26 TPI	N/A
Additional Tools	Optional Stop Perforating Tool	Positive Creasing Tool
Number of Operations	Up to 20 per sheet	Up to 20 per sheet
Minimum Distance	3 mm	1 mm
Time Perforating/Creasing	Yes, Optional	N/A

Standard Tools Cross Direction

Perforating	2 standard heads, max 4 heads simultaneously
Standard Perforation	11 TPI (optional: 17 TPI/26 TPI)
Minimum Distance	30 mm, from line to line
Distance Time Perforation	Minimum 5 mm
Number of Operations	1 - 5 per sheet



CP375 DUO